

Role of spatial coherence in polarization tomography

A. Aiello and J.P. Woerdman
 Huygens Laboratory, Leiden University
 P.O. Box 9504, 2300 RA Leiden, The Netherlands

We analyze an experimental setup in which a quasi-monochromatic spatially coherent beam of light is used to probe a paraxial optical scatterer. We discuss the effect of the spatial coherence of the probe beam on the Mueller matrix representing the scatterer. We show that according to the degree of spatial coherence of the beam, the *same* scattering system can be represented by *different* Mueller matrices. This result should serve as a warning for experimentalists.

OCIS codes: 030.1640, 260.5430, 290.0290.

PACS numbers:

A great deal of literature exists about the phenomenological treatment of polarization of light by matrix methods [1]. Among these methods, the Mueller-Stokes one is perhaps the most utilized for the description of the interaction between a quasi-monochromatic beam of light, hereafter denoted as the probe, and a polarization-affecting medium, namely the scattering system. In the Mueller-Stokes formalism the beam of light is represented by four real numbers, namely the Stokes parameters, and the scattering system is represented by a 4×4 real matrix, the Mueller matrix. Recently [2], considerable efforts have been devoted to the study of the connection between the algebraic properties of Mueller matrices and the corresponding physical properties of the systems they represent. However, in most contributions [1, 2] emphasis is given to the mathematical aspects of the problem rather than to the physical ones.

On the contrary, in the present Letter we study how the spatial coherence of the probe beam affects the physical properties of the Mueller matrix representing a given scattering system. Using Wolf's unified theory of coherence and polarization of random electromagnetic beams [3], we demonstrate that the *same* scattering system can be represented by *different* Mueller matrices, the difference depending on the degree of spatial coherence of the probe beam. Specifically, we show that an optical scatterer may behave either as a non-depolarizing or a depolarizing system according to whether the probe beam was completely spatially coherent or completely spatially incoherent.

A typical experimental setup for polarization tomography consists of five elementary units: The source $\mathcal{S}$, the polarization-preparer $\mathcal{P}$, the scattering system $\mathcal{M}$ [4], the polarization-analyzer $\mathcal{A}$, and the detector $\mathcal{D}$ (see Fig. 1). The source $\mathcal{S}$ emits a quasi-monochromatic beam of light at frequency ω , which is prepared by $\mathcal{P}$ in a well defined pure polarization state. This beam propagates close to the z -axis through a scattering system characterized by its spectral transmission matrix $G_{ij}(\mathbf{r}_1, \mathbf{r}_0, \omega)$, ($i = x, y; j = x, y$), where $\mathbf{r}_0 = (\boldsymbol{\rho}_0, z_0)$, $\mathbf{r}_1 = (\boldsymbol{\rho}_1, z_1)$, and $\boldsymbol{\rho}_A = (x_A, y_A)$, ($A = 0, 1$), are the transverse position vectors on the input ($z = z_0$) and output ($z = z_1$)

planes, respectively. Let $E_j(\mathbf{r}_0, \omega)$, ($j = x, y$) be a spectral Cartesian components of the electric field at the point Q_0 of coordinates $\mathbf{r}_0 = (\boldsymbol{\rho}_0, z_0)$, in the input plane. The Cartesian components of the electric field at the point P_1 of coordinates $\mathbf{r}_1 = (\boldsymbol{\rho}_1, z_1)$ in the output plane are then given by:

$$E_i(\mathbf{r}_1, \omega) = \int d^2\rho_0 G_{ij}(\mathbf{r}_1, \mathbf{r}_0, \omega) E_j(\mathbf{r}_0, \omega), \quad (1)$$

($i = x, y; j = x, y$), where the integration extends over the transverse input-plane coordinates: $d^2\rho_0 = dx_0 dy_0$, and summation on repeated indices is understood. Behind the scatterer, the polarization-analyzer $\mathcal{A}$ can select an arbitrary field component $E(\mathbf{r}_1, \omega) = a_x E_x(\mathbf{r}_1, \omega) + a_y E_y(\mathbf{r}_1, \omega)$, where a_x, a_y are complex amplitudes determined by the analyzer setup. Finally, the detector $\mathcal{D}$ detects the spectral density $S(\mathbf{r}_1, \omega)$ (proportional to the averaged electric field density) of the beam at the point P_1 : $S(\mathbf{r}_1, \omega) = \langle E(\mathbf{r}_1, \omega) E^*(\mathbf{r}_1, \omega) \rangle$, where angular brackets denote the average over an ensemble of realizations of the scattered electric field [5]. This expression for $S(\mathbf{r}_1, \omega)$ is a particular case of the more general formula $S(\mathbf{r}, \omega) = \text{Tr}\{\mathbf{W}(\mathbf{r}, \omega)\}$ [6], where $\text{Tr}\{\mathbf{W}(\mathbf{r}, \omega)\}$ denotes the trace of the 2×2 spectral density matrix $\mathbf{W}(\mathbf{r}, \omega) \equiv \mathbf{W}(\mathbf{r}, \mathbf{r}, \omega)$ evaluated at the point P (specified by the position vector $\mathbf{r}$), and $\mathbf{W}(\mathbf{r}_A, \mathbf{r}_B, \omega)$ is the cross-spectral density matrix of the beam at the pair of points

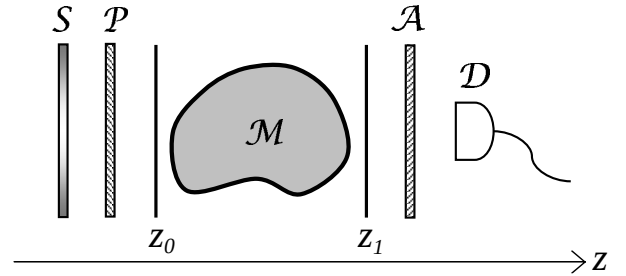


FIG. 1: Polarization tomography setup described in the text. The input ($z = z_0$) and the output ($z = z_1$) planes are indicated by vertical lines.

$\mathbf{r}_A = (\boldsymbol{\rho}_A, z_0), \mathbf{r}_B = (\boldsymbol{\rho}_B, z_0)$ in the plane $z = z_0$:

$$W_{ij}(\mathbf{r}_A, \mathbf{r}_B, \omega) \equiv \langle E_i(\mathbf{r}_A, \omega) E_j^*(\mathbf{r}_B, \omega) \rangle, \quad (2)$$

where $(i = x, y; j = x, y)$ [7].

We now consider the effects of the propagation through the scattering system on the spectral density matrix $\mathbf{W}(\mathbf{r}, \omega)$ of the beam. From Eqs. (1) and (2) it readily follows that

$$\mathbf{W}(\mathbf{r}_1, \omega) = \int d^2 \rho'_0 d^2 \rho''_0 \{ \mathbf{G}(\mathbf{r}_1, \mathbf{r}'_0, \omega) \times \mathbf{W}(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \mathbf{G}(\mathbf{r}''_0, \mathbf{r}_1, \omega) \}, \quad (3)$$

where summation on repeated indices is understood and $W_{kl}(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \equiv \langle E_k(\mathbf{r}'_0, \omega) E_l^*(\mathbf{r}''_0, \omega) \rangle$ are the elements of the cross-spectral density matrix $\mathbf{W}(\mathbf{r}'_0, \mathbf{r}''_0, \omega)$ of the beam at all pairs of points $\boldsymbol{\rho}'_0, \boldsymbol{\rho}''_0$ in the input plane, and $\mathbf{r}'_0 \equiv (\boldsymbol{\rho}'_0, z_0)$, $\mathbf{r}''_0 \equiv (\boldsymbol{\rho}''_0, z_0)$ respectively. Furthermore, $G_{lj}(\mathbf{r}''_0, \mathbf{r}_1, \omega) = G_{jl}^*(\mathbf{r}_1, \mathbf{r}''_0, \omega)$. In order to obtain a formula involving Stokes parameters and Mueller matrices, we multiply both sides of Eq. (3) by the normalized Pauli matrix $\sigma_{(\alpha)}$ ($\alpha = 0, 1, 2, 3$) [8] and trace, obtaining

$$\begin{aligned} \mathcal{S}_\alpha(\mathbf{r}_1, \omega) \\ = \int d^2 \rho'_0 d^2 \rho''_0 \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \mathbf{r}''_0, \omega) \mathcal{J}_\beta(\mathbf{r}'_0, \mathbf{r}''_0, \omega), \end{aligned} \quad (4)$$

($\beta = 0, 1, 2, 3$), where summation on repeated indices is understood and we have defined the spectral density Stokes parameters [9] of the beam in the output plane as: $\mathcal{S}_\alpha(\mathbf{r}_1, \omega) \equiv \text{Tr}\{\sigma_{(\alpha)} \mathbf{W}(\mathbf{r}_1, \omega)\}$. Moreover, we have introduced the *cross-spectral density Mueller matrix*

$$\begin{aligned} \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \mathbf{r}''_0, \omega) \\ \equiv \text{Tr}\{\sigma_{(\alpha)} \mathbf{G}(\mathbf{r}_1, \mathbf{r}'_0, \omega) \sigma_{(\beta)} \mathbf{G}^\dagger(\mathbf{r}_1, \mathbf{r}''_0, \omega)\}, \end{aligned} \quad (5)$$

and the *cross-spectral density Stokes parameters* of the input beam

$$\mathcal{J}_\beta(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \equiv \text{Tr}\{\sigma_{(\beta)} \mathbf{W}(\mathbf{r}'_0, \mathbf{r}''_0, \omega)\}, \quad (6)$$

which reduces to the input spectral density Stokes parameters $\mathcal{S}_\beta(\mathbf{r}'_0, \omega)$ in the limit $\mathbf{r}''_0 \rightarrow \mathbf{r}'_0$.

Eq. (4) shows that unlike the Stokes parameters $\{\mathcal{S}_\alpha\}$ in the elementary theory of partial polarization, the spectral density Stokes parameters $\{\mathcal{S}_\alpha(\mathbf{r}_1, \omega)\}$ at any point P_1 in the output plane are not just a linear combination of the input spectral density Stokes parameters $\{\mathcal{S}_\alpha(\mathbf{r}_0, \omega)\}$ but they are expressed in terms of the cross-spectral density Stokes parameters $\{\mathcal{J}_\beta(\mathbf{r}'_0, \mathbf{r}''_0, \omega)\}$ at *all* pairs of points $\boldsymbol{\rho}'_0, \boldsymbol{\rho}''_0$ in the input plane. This fact obviously represents the effect of the coherence of the input beam. Moreover, since for $\mathbf{r}'_0 \neq \mathbf{r}''_0$, $\mathbf{G}^\dagger(\mathbf{r}_1, \mathbf{r}''_0, \omega) \neq [\mathbf{G}(\mathbf{r}_1, \mathbf{r}'_0, \omega)]^\dagger$, the cross-spectral density Mueller matrix is *not* a Mueller-Jones matrix [2].

So far we have been concerned with a generic spatially coherent light source, without specifying its degree of coherence. We shall now consider with some detail the

two opposite limit cases of completely coherent and completely incoherent light. For both cases we consider a uniformly polarized input beam specified by the coordinate- and frequency-independent two-dimensional unit vector $\mathbf{e} = (e_x, e_y)$, such that $E_i(\mathbf{r}_0, \omega) = e_i E(\mathbf{r}_0, \omega)$, ($i = x, y$), where $E(\mathbf{r}_0, \omega)$ is a scalar function of the point Q_0 in the input plane. Using this assumption, one readily obtains the following expression for the cross-spectral density matrix of the input beam:

$$W_{kl}(\mathbf{r}'_0, \mathbf{r}''_0, \omega) = \mathcal{E}_{kl} w(\mathbf{r}'_0, \mathbf{r}''_0, \omega), \quad (7)$$

where $\mathcal{E}_{kl} \equiv e_k e_l^*$, and $w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \equiv \langle E(\mathbf{r}'_0, \omega) E^*(\mathbf{r}''_0, \omega) \rangle$ is the scalar cross-spectral density function which characterize the second-order coherence properties of the input beam. If we substitute Eq. (7) into Eq. (4) and use Eqs. (5-6) we obtain

$$\begin{aligned} \mathcal{S}_\alpha(\mathbf{r}_1, \omega) = \int d^2 \rho'_0 d^2 \rho''_0 w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \\ \times \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \mathbf{r}''_0, \omega) \mathcal{S}_\beta, \end{aligned} \quad (8)$$

where $\mathcal{S}_\beta \equiv \text{Tr}\{\sigma_{(\beta)} \mathcal{E}\}$, ($\beta = 0, 1, 2, 3$), are the input Stokes parameters which are independent from both the input-plane coordinates $\mathbf{r}_0$ and the frequency ω .

In the case of a completely coherent source

$$w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) = u(\mathbf{r}'_0, \omega) u^*(\mathbf{r}''_0, \omega), \quad (9)$$

where $u(\mathbf{r}_0, \omega)$ represents the complex disturbance of the field in the input plane [10]. From Eqs. (8) and (9) readily follows that $\mathcal{S}_\alpha(\mathbf{r}_1, \omega) = M_{\alpha\beta}^{(C)}(\mathbf{r}_1, \omega) \mathcal{S}_\beta$ where the “coherent” Mueller matrix $\mathbf{M}^{(C)}(\mathbf{r}_1, \omega)$ at the output point P_1 is defined as

$$M_{\alpha\beta}^{(C)}(\mathbf{r}_1, \omega) \equiv \text{Tr}\{\sigma_{(\alpha)} \mathbf{K}(\mathbf{r}_1, \omega) \sigma_{(\beta)} \mathbf{K}^\dagger(\mathbf{r}_1, \omega)\}, \quad (10)$$

where $\mathbf{K}(\mathbf{r}_1, \omega) \equiv \int d^2 \rho_0 u(\mathbf{r}_0, \omega) \mathbf{G}(\mathbf{r}_1, \mathbf{r}_0, \omega)$ represents the tensor-valued complex disturbance of the field in the output plane. Eq. (10) shows that in the ideal case of a completely coherent and uniformly polarized probe beam, the Mueller matrix $M_{\alpha\beta}^{(C)}(\mathbf{r}_1, \omega)$ is a Mueller-Jones matrix [2] representing a *non-depolarizing* scattering system.

In the case of a completely incoherent source

$$w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) = w(\mathbf{r}'_0, \omega) \delta^{(2)}(\boldsymbol{\rho}'_0 - \boldsymbol{\rho}''_0), \quad (11)$$

where $w(\mathbf{r}'_0, \omega) \geq 0$ is the spectral density function of the input beam. If we substitute Eq. (11) in Eq. (8) we obtain $\mathcal{S}_\alpha(\mathbf{r}_1, \omega) = M_{\alpha\beta}^{(I)}(\mathbf{r}_1, \omega) \mathcal{S}_\beta$ where the “incoherent” Mueller matrix $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ at the output point P_1 is defined as

$$M_{\alpha\beta}^{(I)}(\mathbf{r}_1, \omega) = \int d^2 \rho'_0 w(\mathbf{r}'_0, \omega) \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \omega), \quad (12)$$

where the spectral density Mueller matrix $\mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \omega) \equiv \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \mathbf{r}'_0, \omega)$ is now a bona

fide Mueller-Jones matrix. Eq. (12) expresses the incoherent Mueller matrix $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ as a linear combination, with non-negative coefficients $w(\mathbf{r}'_0, \omega)$, of the Mueller-Jones matrices $\mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \omega)$. Therefore $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ is formally equivalent to a Mueller matrix representing a *depolarizing* scattering system [4]. Moreover, from Eq. (12) readily follows that the Hermitian matrix $\mathbf{H}$ [11] associated with $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ is positive semidefinite, namely $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ satisfy the so called Jones criterion and can be referred to as a “physical” Mueller matrix [2].

Eqs. (10) and (12) are the key results of this Letter: they give the Mueller matrices $\mathbf{M}^{(C)}(\mathbf{r}_1, \omega)$ and $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ describing the *same* scattering system probed by either a completely coherent or a completely incoherent light beam, respectively. Surprisingly, we have found that in the first case $\mathbf{M}^{(C)}(\mathbf{r}_1, \omega)$ is a Mueller-Jones matrix which represents a non-depolarizing optical system, while in the second case $\mathbf{M}^{(I)}(\mathbf{r}_1, \omega)$ is a Jones-derived (or “physical”) Mueller matrix that represents a depolarizing optical system.

The more general (and realistic) case of partially coherent quasi-monochromatic light probe is illustrated by Eqs. (4-6,8). In particular Eq. (5) shows that when a partially coherent probe beam is used, the cross-spectral density Mueller matrix may not be interpreted as a Mueller-Jones matrix. However, since in general the cross-spectral density function can be expanded as a superposition of coherent fields $\{u_n(\boldsymbol{\rho}_0, \omega)\}$ as $w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) = \sum_n \gamma_n(z_0, \omega) u_n(\boldsymbol{\rho}'_0, \omega) u_n^*(\boldsymbol{\rho}''_0, \omega)$ [5], where $\gamma_n(z_0, \omega) \geq 0$, it is easy to see that the “partially-coherent” Mueller matrix $\mathbf{M}^{(P)}(\mathbf{r}_1, \omega)$

$$\mathcal{M}_{\alpha\beta}^{(P)}(\mathbf{r}_1, \omega) = \int d^2\rho'_0 d^2\rho''_0 w(\mathbf{r}'_0, \mathbf{r}''_0, \omega) \times \mathcal{M}_{\alpha\beta}(\mathbf{r}_1, \mathbf{r}'_0, \mathbf{r}''_0, \omega), \quad (13)$$

can be also decomposed as a superposition [with non-negative coefficients $\gamma_n(z_0, \omega)$] of “coherent” Mueller-Jones matrices $\mathbf{M}^{(n)}(\mathbf{r}_1, \omega) = \text{Tr}\{\sigma_{(\alpha)} \mathbf{K}_n(\mathbf{r}_1, \omega) \sigma_{(\beta)}^\dagger \mathbf{K}_n^\dagger(\mathbf{r}_1, \omega)\}$ where $\mathbf{K}_n(\mathbf{r}_1, \omega) \equiv \int d^2\rho_0 u_n(\mathbf{r}_0, \omega) \mathbf{G}(\mathbf{r}_1, \mathbf{r}_0, \omega)$. Therefore the matrix $\mathbf{M}^{(P)}(\mathbf{r}_1, \omega)$ represents, in general, a depolarizing optical system. It is worthwhile to note that each matrix $\mathbf{M}^{(n)}(\mathbf{r}_1, \omega)$ depends in a nontrivial way on the field-amplitudes $u_n(\mathbf{r}_0, \omega)$ of the probe beam. Therefore, when using spatially coherent probe beams, the *linearity* required by the Mueller-Stokes formalism can be ensured only with respect to the polarization degrees of freedom of the beam (viz, the matrix indices), but not with respect to the spatial degrees of freedom.

In conclusion, we have shown that, contrary to common belief, the Mueller matrix representing an optical system in a scattering experiment, is not determined by the system only but strongly depends on the spatial co-

herence of the probe beam. This fact poses serious limitations to the range of applicability of the Mueller-Stokes formalism. Consider, for instance, the following case: a probe beam propagates through a medium suffering multiple scattering. Since the degree of spatial coherence of the beam changes during propagation [13], the last part of the medium will be probed by a beam qualitatively different from the one which probed the first part of the medium. Therefore the Mueller matrix representing the medium will not only be determined by the polarization properties of the medium itself, but also by the way the medium affects the coherence properties of the probe beam. With respect to this problem, the use of completely spatially incoherent probe beams for polarization tomography seems highly preferable.

Dirk Voigt, Graciana Puentes and Martin van Exter are acknowledged for valuable discussions. We also acknowledge support from the EU under the IST-ATESIT contract. This project is also supported by FOM.

-
- [1] D. S.Kliger, J. W.Lewis, and C. E. Randall, *Polarized Light in Optics and Spectroscopy* (Academic Press, Inc., 1990). C. Brosseau, *Fundamentals of Polarized Light*, Wiley, New York, 1998.
 - [2] For a recent and quite complete review of the algebraic characterization of Mueller matrices in polarization optics see, for example, A. V. Gopala Rao, K. S. Mallesh, and Sudha, J. Mod. Optics **45**, 955 (1998); *ibidem*, 989 (1998); and reference therein.
 - [3] E. Wolf, Phys. Lett. A **312**, 263 (2003).
 - [4] Hereafter, we denote with “scattering system” *any* passive, linear, optical device, including both deterministic and random systems. For the latter see, e.g., K. Kim, L. Mandel, and E. Wolf, J. Opt. Soc. Am. A **4**, 433 (1987); J.J. Gil, J. Opt. Soc. Am. A **17**, 328 (2000).
 - [5] L. Mandel and E. Wolf, *Optical Coherence and Quantum Optics* (Cambridge University Press, 1995), 1st ed.
 - [6] L. Mandel, E. Wolf, Rev. Mod. Phys. **37**, 231 (1965).
 - [7] For the physical meaning of $\mathbf{W}(\mathbf{r}_A, \mathbf{r}_B, \omega)$ and its relation with the 2×2 coherence matrix $\mathbf{J}$ used in elementary theory of partial polarization, see Ref. [3], pag. 264.
 - [8] A. Aiello, J. P. Woerdman, arXiv:math-ph/0412061 (2004).
 - [9] The spectral density Stokes parameters were originally introduced by Carozzi *et al.*: T. Carozzi, R. Karlsson, and J. Bergman, Phys. Rev. E **61**, 2024 (2000). However, our definition is slightly different from their one since we use the normalized Pauli matrices $\{\sigma_{(\alpha)}\}$ defined in Ref. [8].
 - [10] M. Born and E. Wolf, *Principles of Optics* (Pergamon Press, 1993), 6th ed.
 - [11] D. G. M. Anderson, and R. Barakat, J. Opt. Soc. Am. A **11**, 2305 (1994).
 - [12] See, for example, Ref. [11] for a detailed analysis of many published Mueller matrices.
 - [13] E. Wolf, Opt. Lett. **28**, 1078 (2003).